

## FILAMENT DECORATIVE G-16.5, G25 4W & 5W



**G16.5  
4W**



**G25  
5W**



## SPECIFICATIONS

### ELECTRICAL


	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	POWER FACTOR	LIFETIME	WATT REPLACEMENT
<b>G16.5</b>	<b>LR21610</b>	LED4G16.5/C/CL/27K/D	4	120V	YES	110	0.7	10,000	40W
	<b>LR21611</b>	LED4G16.5/C/CL/50K/D	4	120V	YES	110	0.7	10,000	40W
<b>G25</b>	<b>LR21619</b>	LED5G25/CL/27K/D	5	120V	YES	110	0.7	10,000	60W
	<b>LR21620</b>	LED5G25/CL/50K/D	5	120V	YES	110	0.7	10,000	60W

### PHOTOMETRIC


MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	CASE	COST/YR	BASE TYPE	FINISH
<b>LR21610</b>	2700K	WARM WHITE	400	330°	80	50	\$ 0.48	E12	CLEAR
<b>LR21611</b>	5000K	BRIGHT WHITE	400	330°	80	50	\$ 0.48	E12	CLEAR
<b>LR21619</b>	2700K	WARM WHITE	550	330°	80	50	\$ 0.60	E26	CLEAR
<b>LR21620</b>	5000K	BRIGHT WHITE	550	330°	80	50	\$ 0.60	E26	CLEAR

### GENERAL

## DIMENSIONS

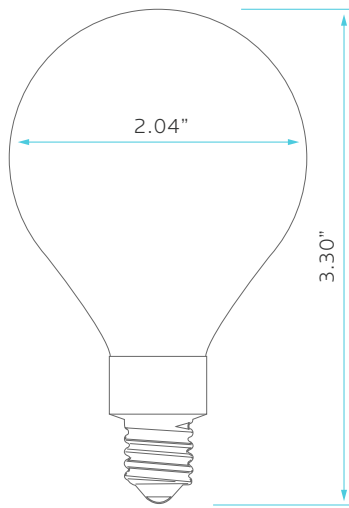

**G16.5**

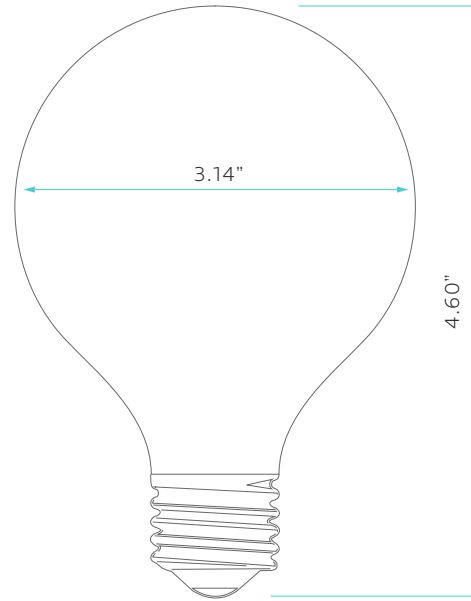

**G25**